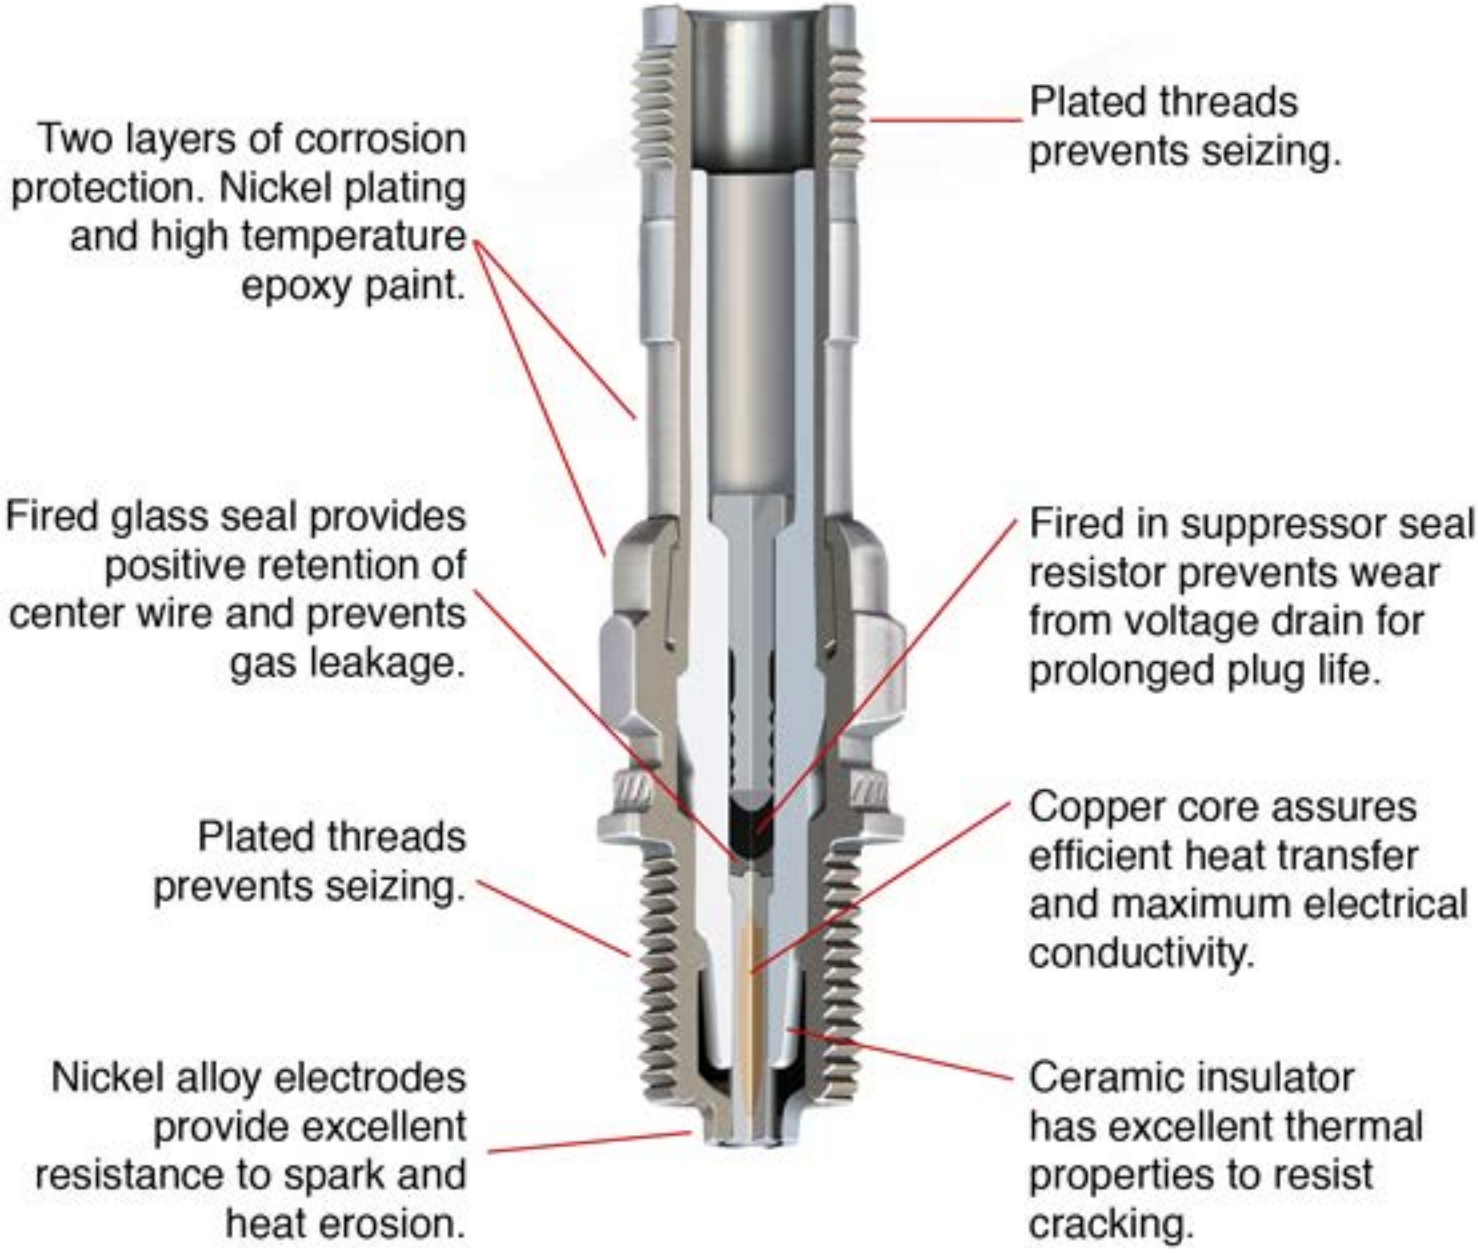
Plated threads prevents seizing.
Two layers of corrosion protection. Nickel plating and high temperature epoxy paint.
Fired glass seal provides positive retention of center wire and prevents gas leakage.
Fired in suppressor seal resistor prevents wear from voltage drain for prolonged plug life.
Plated threads prevents seizing.
Copper core assures efficient heat transfer and maximum electrical conductivity.
Nickel alloy electrodes provide excellent resistance to spark and heat erosion.
Ceramic insulator has excellent thermal properties to resist cracking.